


10W, 50W, 80W, 100W, 150W, 200W  
 250W, 400W, 600W  
 FLANGED POWER RESISTORS, RFR

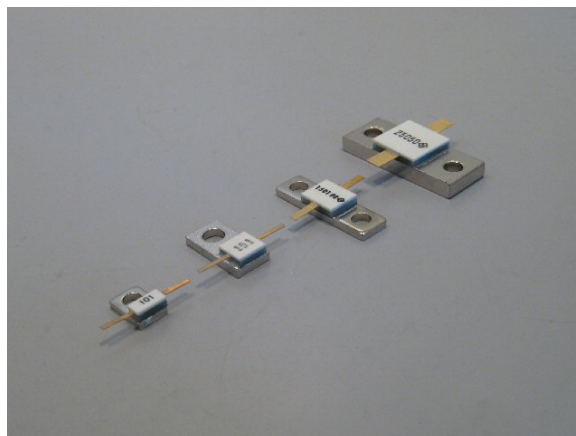

**Features:**

- High power flanged resistors for all DC up to 4GHz applications.
- Small size and wide frequency range specifications realized with through large heat conducting AlN substrate.
- Sufficient mechanical strength metallization from spattered thin film technology.
- 50ohm resistance with tolerance 1%, and terminations include chips and many style flange provided as standard, and other resistance and power available.
- Long life and temperature stability are shown by a result of Ni-Cr thin film technology.


**Applications:** Termination for isolator/circulators, Fixed station of mobile communication electronics, High power microwave amplifiers

**Ordering Information**

Type RFR050	Style 120	TCR C	Resistance 201	Tolerance F	RoHS/Package Z00
RFR010	110	C	50 Ohm	F	Z00
RFR050	120	(50ppm)	100 Ohm	(1.0%)	
RFR080			150 Ohm		
RFR100			200 Ohm		
RFR150			250 Ohm		
RFR200			300 Ohm		
RFR250			400 Ohm		
RFR400			600 Ohm		
RFR600			800 Ohm		

**Performance and Materials**


Type	Rated Power (W)	Heat Resistance (deg C/W)	Cp (uF)	50ohm VSWR 500MHz	50ohm VSWR 1GHz
RFR010	10	6.5			1.15
RFR050	50	2.5			1.15
RFR080	80				1.20
RFR100	100	1.3			1.20
RFR150	150				1.30
RFR200	200				
RFR250	250	0.5			1.30
RFR400	400			---	
RFR600	800			---	

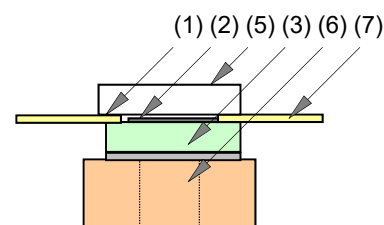


	Substance	Material
(1)	Cold end Terminal	Tin plated Ni-Cu
(2)	Resistive	Ni-Cr
(3)	Substrate	ALN
(4)	Hot end Terminal	Tin plated Ni-Cu
(5)	Cover	ALO
(6)	Flange	Ni plated Cu
(7)	Beam Lead	Au plated Cu

10W, 50W, 80W, 100W, 150W, 200W, 250W, 400W, 600W, RESISTORS


Style and Dimension (mm)

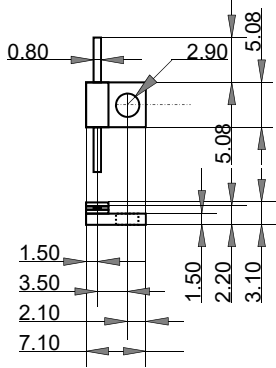


RFR010 120

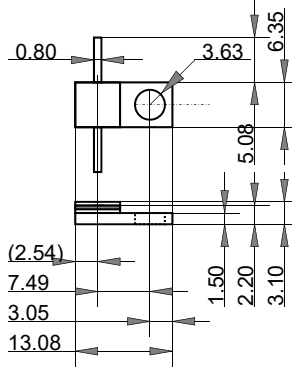


RFR050 120 RFR080 120

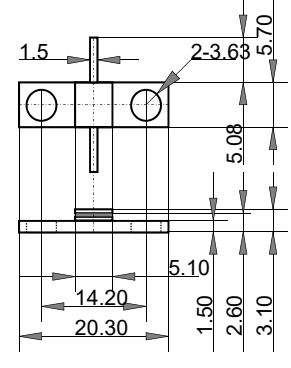


RFR050 110

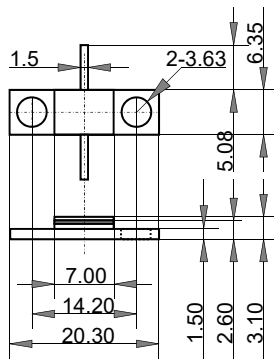


RFR100 110

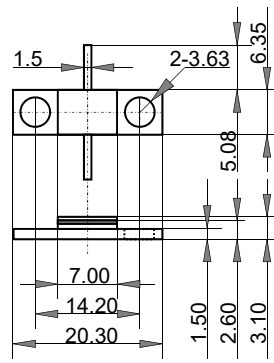


RFR150 110

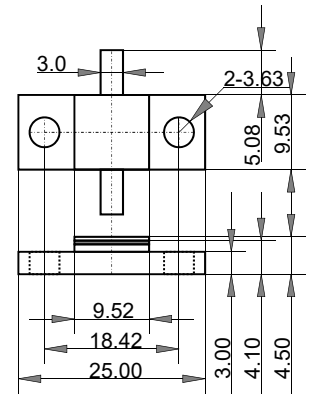


RFR200 110

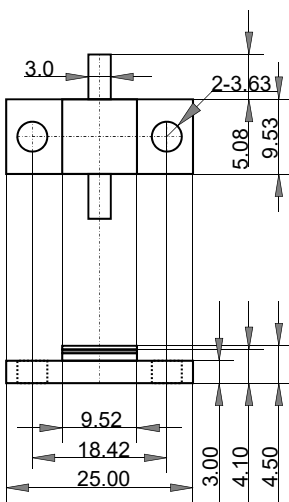

RFR250 110

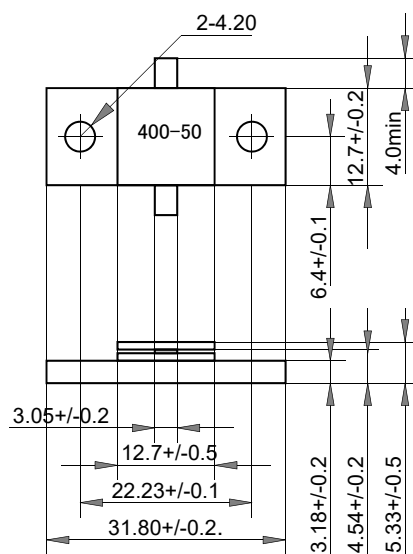

RFR400 110

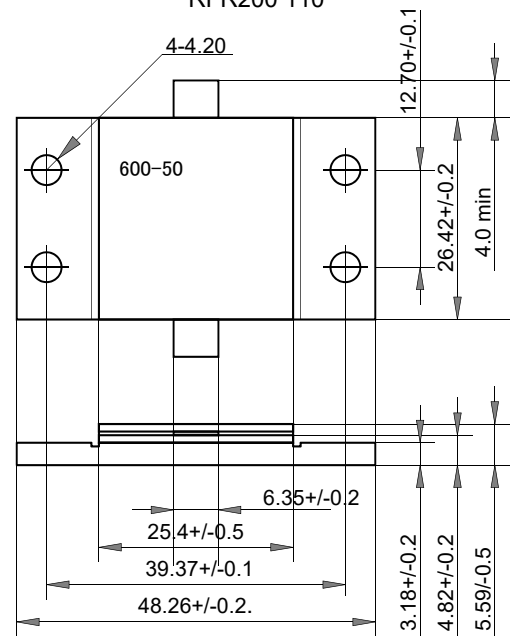

RFR600 110